


8
7
6
5
4
3
2
1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
INTELLICEPT. ANY REPRODUCTION IN PART OR WHOLE WITHOUT
THE WRITTEN PERMISSION OF INTELLICEPT IS PROHIBITED.

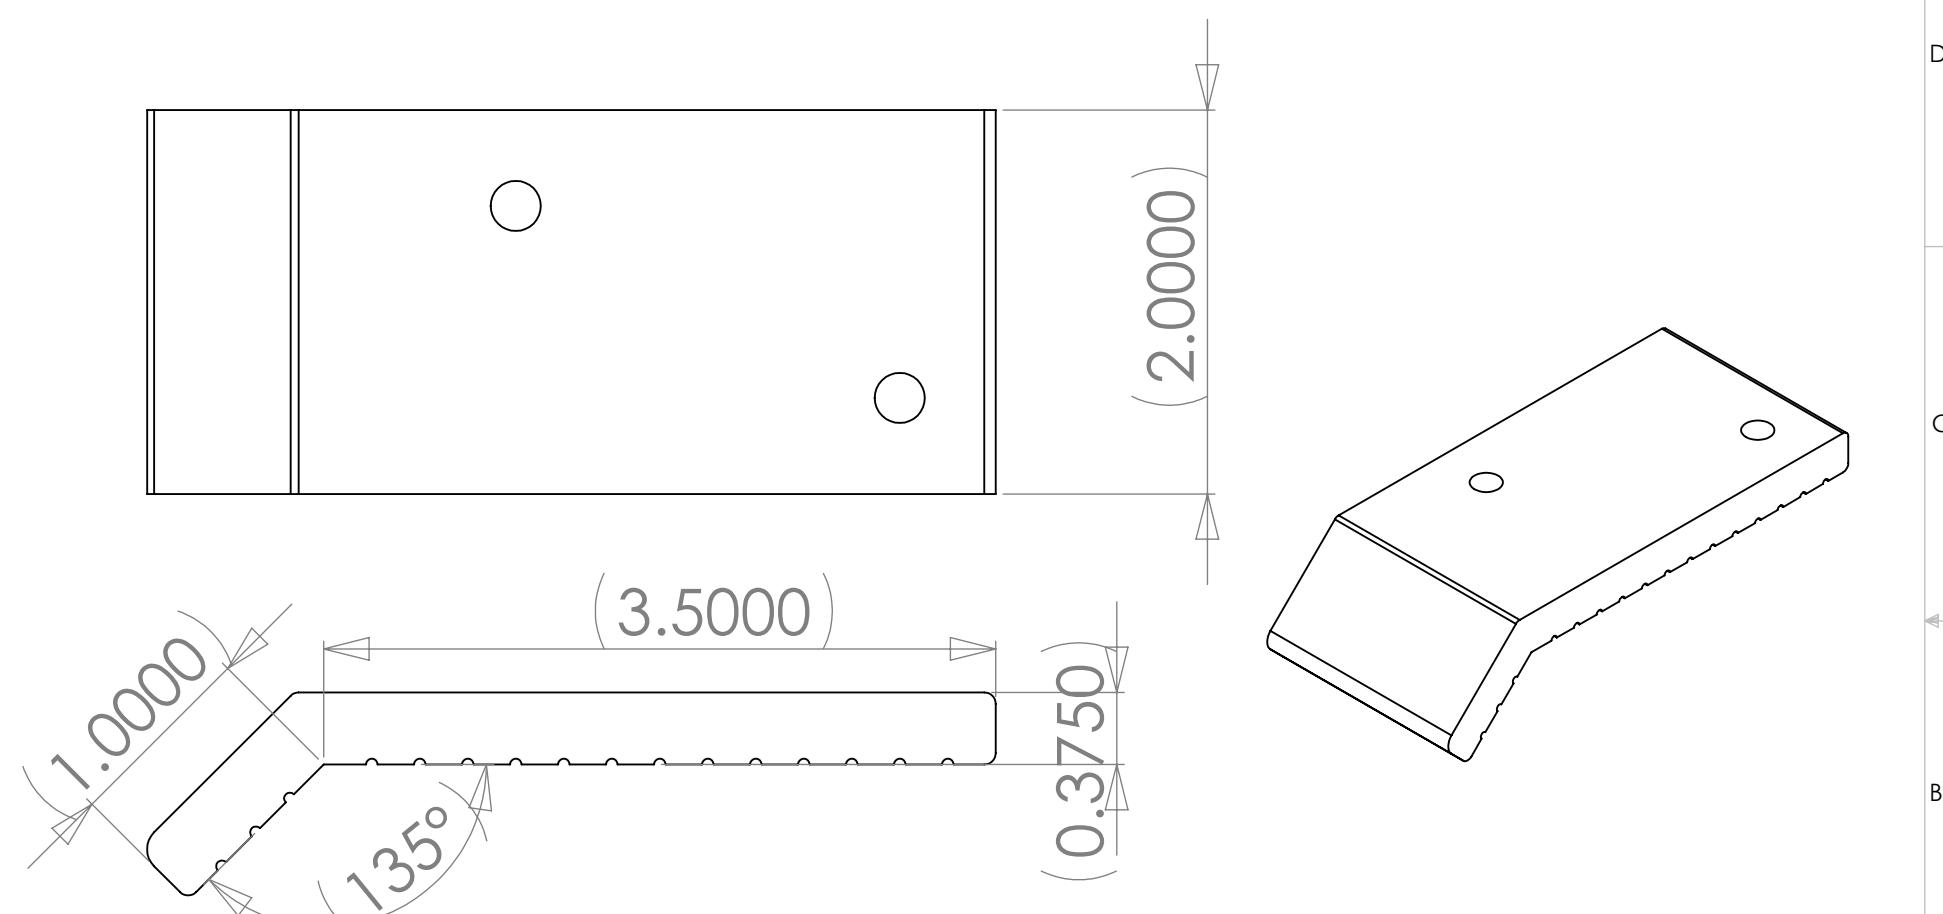

6061 T6 Aluminum. Debur. Type II Clear anodize or Hard Anodize.
Two offset thru holes set with Smart Pins Plus and epoxy.

Spacing: product to be spaced 18-24" from end of the wall and approx
36" +/- 6" on center (do not exceed 4' max). Do not apply product at
grout joint. For applications with grout joints, layout should be symmetric
but part locations must be safe drilling distance from joint (min 4").

**Not intended for use on steps, stairs, sidewalk curb or
any other pedestrian trafficked surface**

INTELLICEPT
SAN DIEGO, CALIFORNIA, U.S.A.

FA135
for chamfer 3/4" or
greater

SIZE	DWG. NO.	REV.
A		

8
7
6
5
4
3
2
1
8
7
6
5
4
3
2
1
A
A