



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INTELICEPT. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INTELICEPT IS PROHIBITED.

D

C

B

A

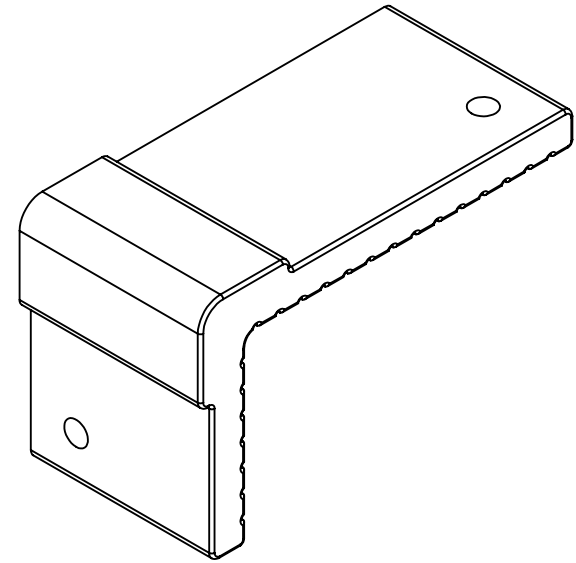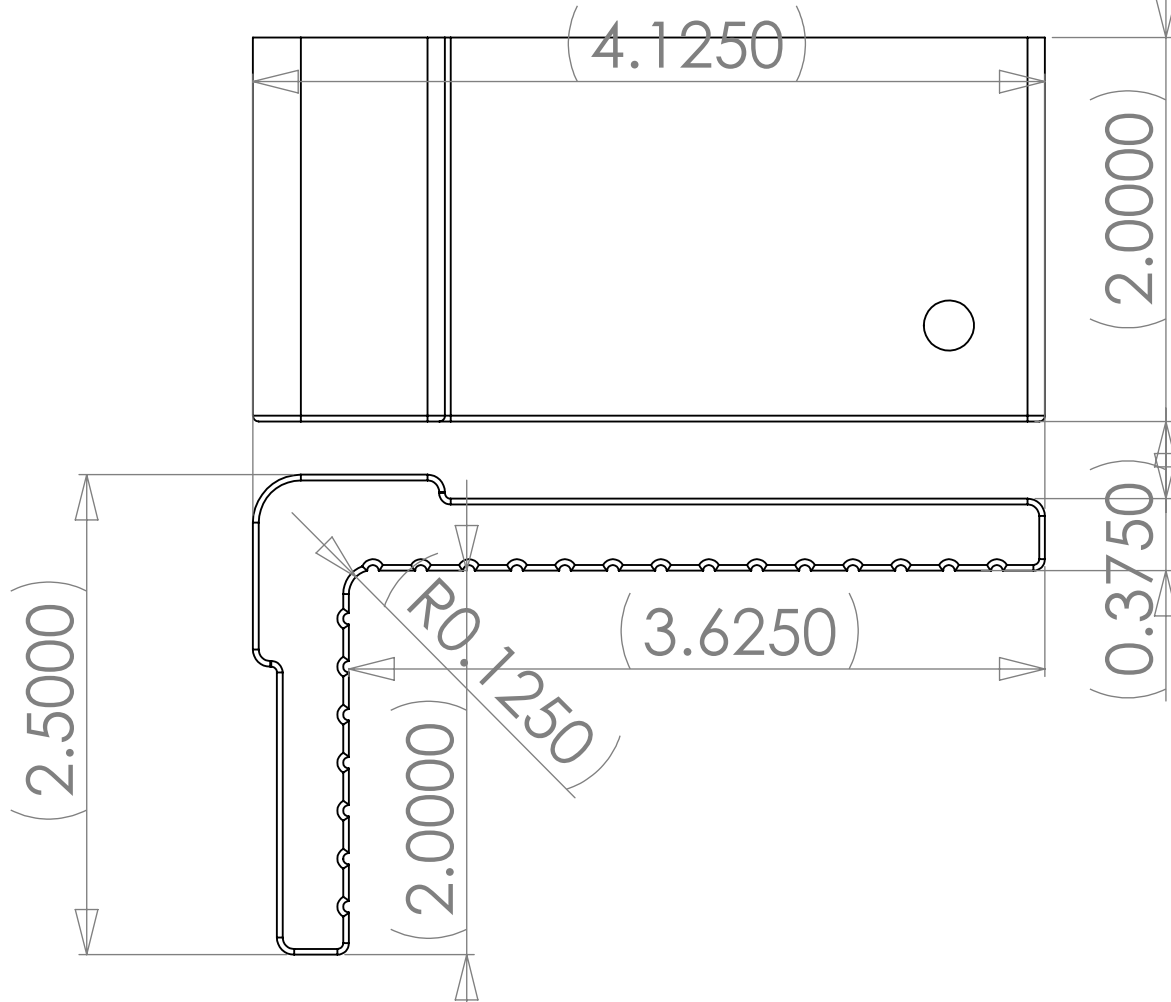

D

C

B

A

6061 T6 Aluminum. Debur. Type II Clear anodize or Hard Anodize.
Two offset thru holes set with Smart Pins Plus and epoxy.

Spacing: product to be spaced 18-24" from end of the wall and approx 36" +/- 6" on center (do not exceed 4' max). Do not apply product at grout joint. For applications with grout joints, layout should be symmetric but part locations must be safe drilling distance from joint (min 4").

Not intended for use on steps, stairs, sidewalk curb or any other pedestrian trafficked surface

INTELICEPT
SAN DIEGO, CALIFORNIA, U.S.A.

FA90A

SIZE A	DWG. NO.	REV.
SCALE	CAD FILE:	SHEET OF

2

1